



# HÄFELE 155° SMUSO QUICK FIXING SOFT CLOSE HINGES




Drilling dimensions for cup fixing  
Drilling pattern 45/9.5



- > Opening angle 155°
- > Zero protrusion
- > Full overlay, half overlay/twin or inset mounting
- > Automatic closing
- > Ø 35 mm cup
- > For door thickness 14-24 mm see table below
- > Side adjustment ±3 mm, height adjustment ±2 mm (via mounting plate), depth adjustment ±2.5 mm
- > Screw fixing cup
- > Available with integrated soft close or without (full overlay version only)
- > Smuso - with integrated soft closing mechanism
- > Quick fixing arms
- > Drilling pattern 45/9.5
- > Nickel-plated pressed steel cup and arm
- > Order fixing screws separately
- > Order qty: 1 pc

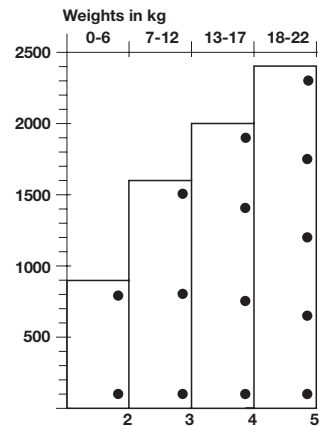

## Full overlay mounting

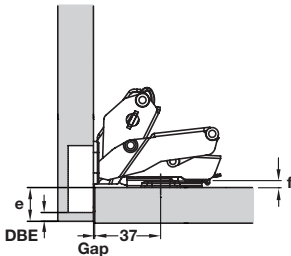

| Overlay - coverage of the side end by door e mm |    |    |    |    |    |    |                            |    |   |
|---|----|----|----|----|----|----|----------------------------|----|---|
| 13  | 14 | 15 | 16 | 17 | 18 | 19 | 20                         | 21 |   |
|   |    |    |    | 3  | 4  | 5  | 6                          | 7  | 0 |
|   |    | 3  | 4  | 5  | 6  | 7  |                            |    | 2 |
| 3   | 4  | 5  | 6  | 7  |    |    |                            |    | 4 |
| DBE distance to cup bore edge mm                |    |    |    |    |    |    | Mounting plate height f mm |    |   |



| Fixing       | Without soft close | With soft close |
|--------------|--------------------|-----------------|
| Screw fixing | 311.63.739         | 311.63.730      |

PAGE AMENDED  
12.03.21/3