



# GRASS NEXIS PIE CUT CORNER HINGE








Hinge cup

Mounting plate

- > Opening angle 155°
- > For door thickness 16 to 22 mm
- > Ø 35 mm cup
- > Screw fixing
- > Choice of click on or slide on arms
- > Nickel-plated zinc alloy hinge
- > Order fixing screws separately
- > Order qty: 1 pc

Door thickness	Distance from edge	Mounting plate
( <b>b</b> )	( <b>a</b> )	thickness
16	25	4
17	24	4
18	22	2
19	21	2
20	20	2
21	18	0
22	17	0

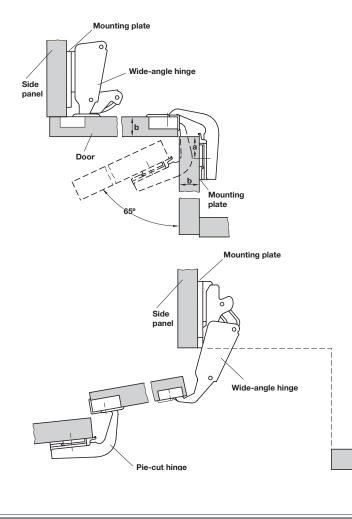

TCH TECHNOLOGY 2018, @ Häfele U.K. Ltd 2018. Dimensional data not binding. We reserve the right to alter specifications without notice.





9





3. Locator applies sideways tension, preventing dropping of the cabinet door.

Finish White



Section 9

Page

81

TCH TECHNOLOGY 2018, © Häfele U.K. Ltd 2018. Dimensional data not binding. We reserve the right to alter specifications without notice


9

# MOUNTING PLATES FOR NEXIS CLICK ON HINGES



Nexis click on hinges are shown on pages 72-89

### Grass Nexis super compact cruciform mounting plate



For Varianta screws





- > For click on systems
- > Varianta or Hospa screw fixing
- > Two part plate with external height adjustment
- > Nickel-plated zinc alloy and pressed steel > Order fixing screws separately
- > Order qty: 1 pc

FIXINGS REQUIRED




	⇔5	Ø 3.5	RANTY
Height	Varianta screws	Hospa screw	
0 mm	322.86.750	322.85.750	
2 mm	322.86.752	322.85.752	
4 mm	322.86.754	322.85.754	
8 mm	322.86.758	322.85.758	
18 mm	322.86.759	322.85.759	
-			

Information on mounting plate adjustment is shown on page 33


### Grass Nexis cruciform mounting plate





With pre-mounted Euro screws





> For click on systems
------------------------

- > With pre mounted euro screws or Hospa screw fixing
- > One part plate with external height adjustment
- > Nickel-plated pressed steel
- > Order fixing screws separately for Hospa screw fixing versions
- > Order qty: 1 pc

		HOSPA Ø 3.5	YEAR WARRANT
Height	Pre-mounted Euro screws	Hospa screw	
0 mm	322.94.710	322.94.700	
2 mm	322.94.712	322.94.702	
4 mm	322.94.714	322.94.704	

Fixings

PAGE AMENDED 13.04.18/1



### Grass Nexis cruciform cam adjusting mounting plate





With pre-mounted Euro screws



TCH TECHNOLOGY 2018, @ Häfele U.K. Ltd 2018. Dimensional data not binding. We reserve the right to alter specifications without notice.



For Hospa screws

- > For click on systems
- > With pre-mounted Euro screws or Hospa screw fixing
- > Two part plate, eccentric cam adjusting
- Nickel-plated zinc alloy
- > Order fixing screws separately for Hospa screw fixing versions
- > Order qty: 1 pc


25

9

Fixings included	FIXINGS REQUIRED HOSPA Ø 3.5
e-mounted Euro screws	Hospa screw
322.89.720	322.89.700

Height	Pre-mounted Euro screws	Hospa screw	
0 mm	322.89.720	322.89.700	
2 mm	322.89.722	322.89.702	
4 mm	-	322.89.704	
8 mm	-	322.89.708	
-			

### Grass Nexis straight cam adjusting mounting plate



#### > For click on systems

- > Hospa screw fixing
- > Two part plate, eccentric cam adjusting
- > Nickel-plated zinc alloy
- > Order fixing screws separately
- > Order qty: 1 pc

Height	Hospa screw
0 mm	322.72.720
2 mm	322.72.722
4 mm	322.72.724





# GRASS MOUNTING PLATES FOR NEXIS SLIDE ON HINGES



Nexis slide on hinges are shown on pages 72-89

Grass Nexis super compact cruciform mounting plate





32



> For slide on systems > Varianta or Hospa screw fixing

- > Two part plate with external height adjustment
- > Nickel-plated zinc alloy and pressed steel
- > Order fixing screws separately
- > Order qty: 1 pc

		FIXINGS REQUIRED HOSPA Ø 3.5
Height	Varianta screws	Hospa screw
0 mm	323.86.708	323.85.701
2 mm	-	323.85.729
4 mm	323.86.744	323.85.747



Furniture Hinges and Flap Fittings: Hinges


9

Information on mounting plate adjustment is shown on page 33

### Grass Nexis super compact cruciform mounting plate









## Grass Nexis straight mounting plate





- > For slide on systems
- > With Pre-mounted Euro screws or Hospa screw fixing
- > One part plate with external height adjustment
- > Nickel-plated pressed steel
- > Order fixing screws separately for Hospa screw fixing versions
- > Order qty: 1 pc

	Fixings included	HOSPA Ø 3.5
Height	Pre-mounted Euro screws	Hospa screw
0 mm	323.84.704	323.83.707
2 mm	323.84.722	323.83.725
4 mm	323.84.740	323.83.743

- > For slide on systems
- > Hospa screw fixing
- > Two part plate with internal height adjustment
- > Nickel-plated zinc alloy and pressed steel
- > Order fixing screws separately
- > Order qty: 1 pc

	Ø 4.0
Height	Hospa screw
0 mm	323.71.707
2 mm	323.71.725
4 mm	323.71.743





9

Furniture Hinges and Flap Fittings: Hinges

grass **25** 

# GRASS COVER PLATES FOR NEXIS HINGES



Nexis slide on hinges are shown on pages **72-89** 

### Grass hinge cup cover cap

	<ul> <li>For use with Ø 35 mm cup hinges s</li> <li>Covers screw fixing hinge cup of the aesthetic appearance</li> <li>No fixing materials required, clips or</li> <li>Zinc alloy</li> <li>Order qty: 1 pc</li> </ul>	ose hinges without soft close for
	Finish	Cat. No.
	Nickel-plated	322.67.191
Grass hinge arm cover plate		
	<ul> <li>&gt; Please note: Cover plate to match compatible</li> <li>&gt; Nickel-plated steel</li> <li>&gt; Order qty: 1 pc</li> </ul>	full overlay hinge is not soft close

		WARRANT
To match	Full overlay	Half overlay
Cat. No.	323.68.300	323.68.310

#### ACCESSORIES AND INSTALLATION 600 mm 16-22 kg TOOLS FOR NEXIS HINGES 10-15 kg 🔘 Max. 2500 mm 6-9 ka Max. 2200 mn Max 1600 mm 4-5 ka C Max 900 mm 0 0 0 Nexis hinges are shown on pages 72-89 1 1 2 2 Ο Recommended position for Soft close Grass soft close fitting, for screw fixing cup > For use with 95°/100°/110°/125°/45°/30°/post/-24°/-14° sprung concealed hinges with screw fixing cup > The quantity and position of soft close will depend on door height and weight, see chart above > No fixing materials required, clips onto hinge cup > Zinc alloy > Order qty: 1 pc Finish Cat. No. Nickel-plated 322.67.190 Grass soft close fitting, for screw fixing cup > For use with sprung 170° concealed hinges with screw or dowel fixing cup - shown on page 78-79 > The quantity and position of soft close will depend on door height and weight, see chart above > No fixing materials required, clips onto hinge arm > Zinc alloy > Order qty: 1 pc Cat. No. Finish Nickel-plated 322.67.170 Grass opening angle reduction clip for 170° hinge > For use with sprung 170° concealed hinges - shown on page 78-79 > Reduces the opening angle to 120° > Prevents doors from coliding with the cabinet side in inset or mitred corner applications > Black plastic > Order qty: 1 pc Cat. No. For use with 170° hinge 322.66.320 Grass opening angle reduction clip for 110° hinge > Reduces the opening angle to 85° > Prevents doors from coliding with fronts or walls in corner applications > For use with 110° hinges shown on page 76 > Black plastic > Order qty: 1 pc Cat. No. 322.66.310 For use with 110° hinge

Furniture Hinges and Flap Fittings: Hinges

9

Section 9 104



#### Grass jig for mounting plates and hinges



#### > For use with all Click on hinges and mounting plates

> For drilling holes for hinges with either screw fixing or pre-mounted

- > For overlay installation only
- > Reversible
- Black plastic
- > Order qty: 1 pc

Mounting plate jig

euro screws

> 2x drill Ø 8 mm
> 1x drill Ø 35 mm
> Bit for boring machine
> Order qty: 1 pc

> Bit for hand drill machine

> With template for wing mounting plate

Cat. No. 001.33.160

Grass drilling jig 500













	YEAF WARRA
Drilling pattern	Cat. No.
48/9	001.33.400

> Available to order separately

> Order qty: 1 pc

Grass mounting plate jig



	GRJ 2 VE WARR
	Cat. No.
Mounting plate jig	001.33.420

Furniture Hinges and Flap Fittings: Hinges



