KNUCKLE CATCH (MORTISE TYPE)

TEST METHOD NO SCREW **JCU**

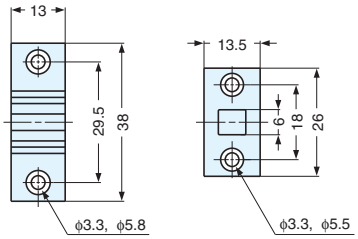



Item No.	Push in Force (kg)	Pulling Force (kg)	Weight (g)	Box (pcs)	Carton (pcs)
JCU	2.0	2.3	3.5	50	1000

Part Name	Material	Color
Catch	Polyacetal	White
Strike	Polyamide	

SNAP-IN KNUCKLE CATCH

TEST METHOD NO SCREW **JCU-F**

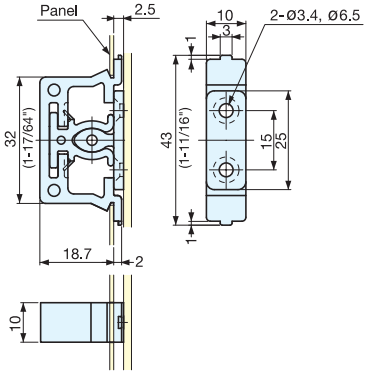

- Snap-in type body for easy installation.
- Designed for sheet metal or plastic panel applications.
- Internal catch body slides 1.5mm for better alignment.

Item No.	Push in Force (kg)	Pulling Force (kg)	Weight (g)	Box (pcs)	Carton (pcs)
JCU-F	2 (4.4 lbs)	2 (4.4 lbs)	5.2	40	800

Part Name	Material	Color
Catch	Polyacetal	White
Strike	Polyamide	

Panel Thickness	Cut Out Dimensions
0.8mm	32.3×10.3
1.0mm	32.9×10.3
1.2mm	33.8×10.3

STAINLESS STEEL ROLLER CATCH

NO SCREW STAINLESS 304 STEEL **STBRC**

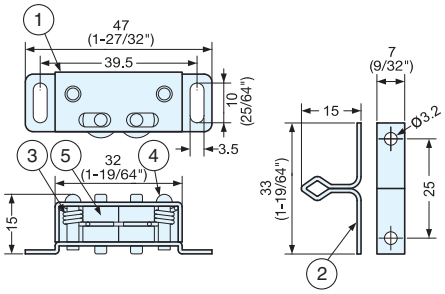

Item No.	Push in Force (kg)	Pulling Force (kg)	Weight (g)	Box (pcs)	Carton (pcs)
STBRC	1.0 (2.2 lbs)	2.7 (6.0 lbs)	18	60	1200

No.	Part Name	Material	Finish
☒	Body	304 Stainless Steel	Plain
☒	Strike		
☒	Spring		
☒	Rivet	430 Stainless Steel	
☒	Roller	Polyethylene	White

ADJUSTABLE KNUCKLE CATCH

NO SCREW **1-555, 3-555**

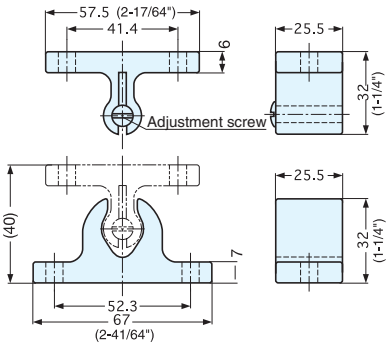

- Strong catch force.
- Force is adjustable by turning screw.

Item No.		Push in Force (kg)	Pulling Force (kg)	Weight (g)	Box (pcs)	Carton (pcs)
1-555-2/WHT	3-555-4/BLK	13~26 (29~57 lbs)	8~20 (18~44 lbs)	42	20	200

Material	Color
Polyamide	White (WHT), Black (BLK)