


# TECHNICAL SPECIFICATION



VS110

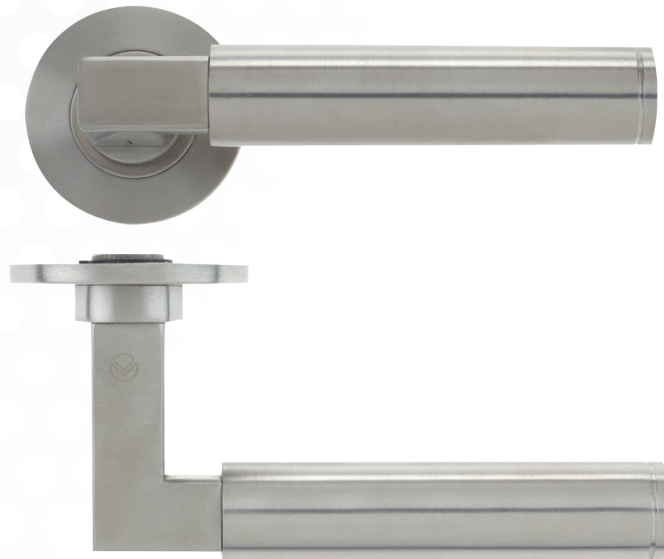

## CODE

## FINISH

**VS110**

Satin Stainless

## SPECIFICATIONS

- BS EN 1906 : 2010 Grade 3
- BS EN 1670 : 2007 Grade 5 (Corrosion)
- Tested to 200,000 cycles
- Grade 304 Stainless Steel
- 52 x 4mm Unsprung Rose
- Heso Spindle
- Bolt through fixings included
- Suitable for 35 - 54mm Thickness Timber Doors

## STANDARDS



## SUITABLE



CODE	DESCRIPTION	FINISH	ADDITIONAL INFO.
VS110	Designer Lever - Push on Rose	SS	22mm Dia. Tubular Lever
		<p>URS is a member of Registrar of Standards (Holdings) Ltd.</p>	