


## Royde & Tucker H300 rising butt hinge

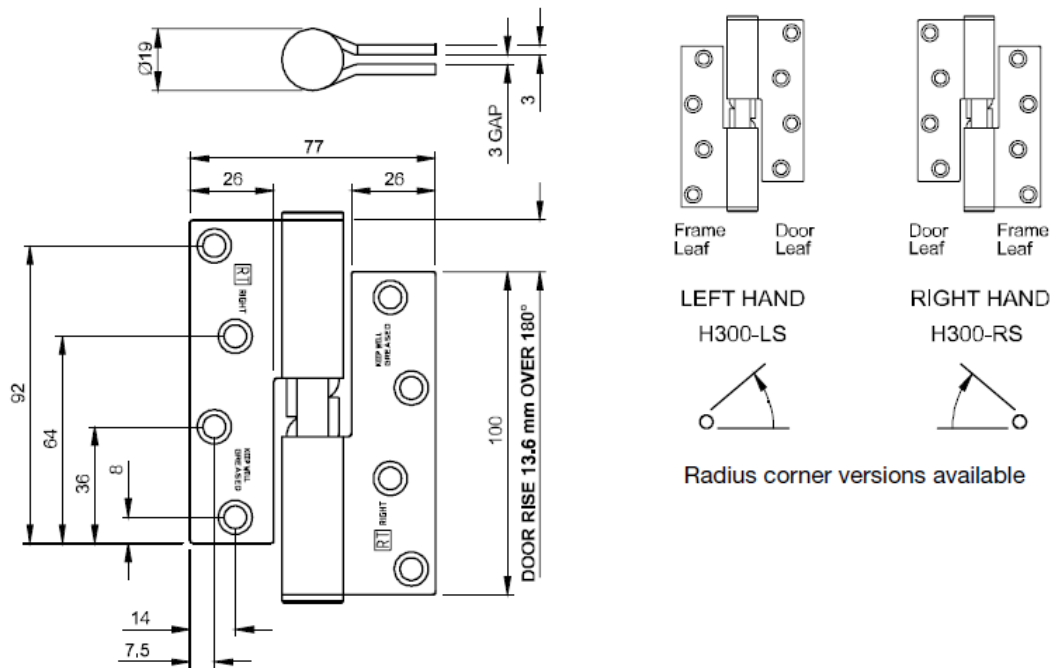

## These hinges cause the door to SHUT

### Rising butt hinge

- 100x77x3mm rising butt hinge
- These hinges cause the door to SHUT
- Maximum adjusted door weight 50kg as standard or up to 80kg (please contact the sales office for advise).
- Minimum door thickness 29mm
- c/w metric 5 x 32mm wood screws
- Radius R5 on LR/RR versions
- To ensure correct working, pairs of rising butts must be fitted co-axially with screws supplied.
- Special door head/frame details may be required to allow the door to rise
- Due to the precision engineering of our rising butt hinges, 3 or even 4 can be used per door leaf, if required
- Unless otherwise stated stainless steel substrate, Grade 316 stainless steel available

### Notes:

- These butt hinges are not to be confused with the HI-LOAD range, in that they require regular maintenance. After fitting, the cam faces and pin must be lubricated with grease supplied, following the manufacturer's instructions.

**Royde & Tucker Ltd**  
 Bilton Road  
 Cadwell lane  
 Hitchin  
 SG4 0SB  
 Tel: 01462 444444  
 Fax: 01462 444433  
 www.ratman.co.uk  
 e-mail: sales@ratman.co.uk