

TORQUE DAMPER





UDH

HINGES

TORQUE DAMPER



PAT

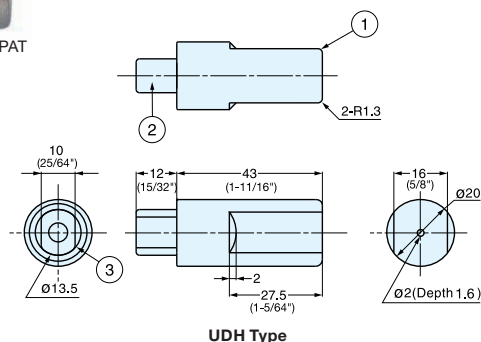
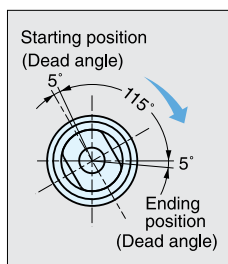


UDH Type

- Keeps lid from slamming shut.
- High torque within compact cartridge.
- Operating temperature: 0°C~40°C (32°F~104°F)



PAT

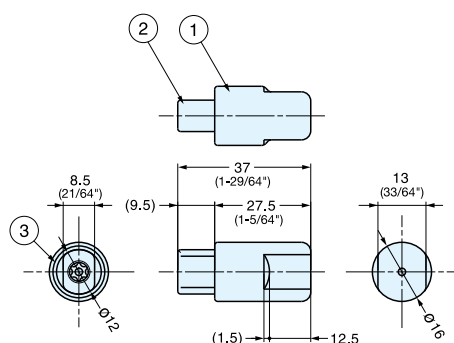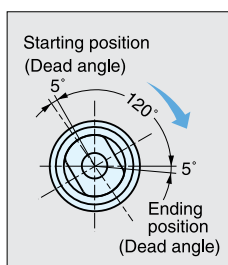



UDH-16 Type



Application



PAT

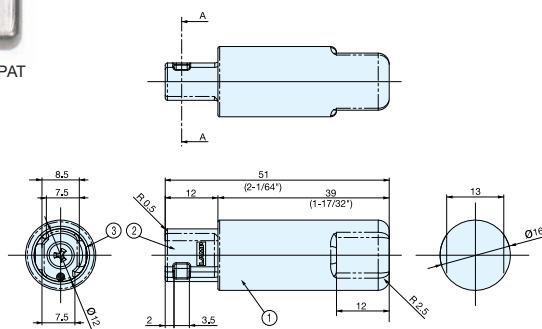

UDH-16N Type

UDH Type

No.	Part Name	Material	Finish / Color
①	Body	304 Stainless Steel equivalent	Plain
②	Shaft	PBT Plastic	A-White, B-Grey
③	Cover Ring	304 Stainless Steel equivalent	-

UDH-16 Type

No.	Part Name	Material	Finish / Color
①	Body	304 Stainless Steel equivalent	Plain
②	Shaft	PBT Plastic	A-White B-Grey
③	Cover Ring	PBT Plastic	-

UDH-16N Type

No.	Part Name	Material	Finish / Color
①	Body	304 Stainless Steel equivalent	Plain
②	Shaft	PBT Plastic	A-White B-Grey
③	Cover Ring	PPS Plastic	-

Item No.	Torque per piece (kgf·cm)	Dampening Direction	Weight (g)	Carton(pcs)
UDH-AMS	15~25 (13~21 lbs-in)	Counter Clockwise	38	200
UDH-BMS		Clockwise		
UDH-AHS	25~35 (21~30 lbs-in)	Counter Clockwise	38	200
UDH-BHS		Clockwise		
UDH-AGS	35~40 (30~34 lbs-in)	Counter Clockwise	16	200
UDH-16AMS	10.2~17.3 (8.8~15 lbs-in)	Counter Clockwise		
UDH-16BMS		Clockwise		
UDH-16AHS	17.3~25.5 (15~22 lbs-in)	Counter Clockwise	16	200
UDH-16BHS		Clockwise		
UDH-16N AMS	20.4~26.5 (17.7~23 lbs-in)	Counter Clockwise	20	200
UDH-16N BMS		Clockwise		
UDH-16N AHS	24.5~30.6 (21.2~26.5 lbs-in)	Counter Clockwise	20	200
UDH-16N BHS		Clockwise		