

CONCEALED HINGE (9mm OVERLAY)



100-46/9, C46/9 SUS 304B





■ Door edge to bore edge distance (C) and Overlay distance (B) Table 1.

Door edge to bore edge distance (C)	3	4	5
Overlay distance (B)	7	8	9

■ Hinge side opening clearance chart Table 2.

Door thickness (D)	Door edge to bore edge distance (C)		
	3	4	5
15	0.5	0.5	0.5
16	0.7	0.7	0.7
17	0.8	0.8	0.8
18	1.0	1.0	1.0
19	1.2	1.2	1.2
20	1.4	1.4	1.4
Hinge side O.C. (A)			

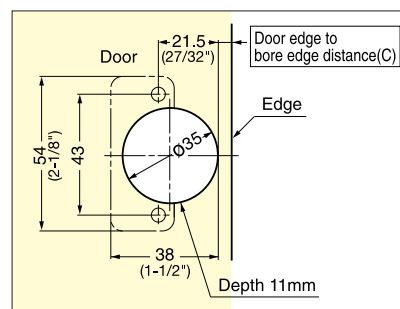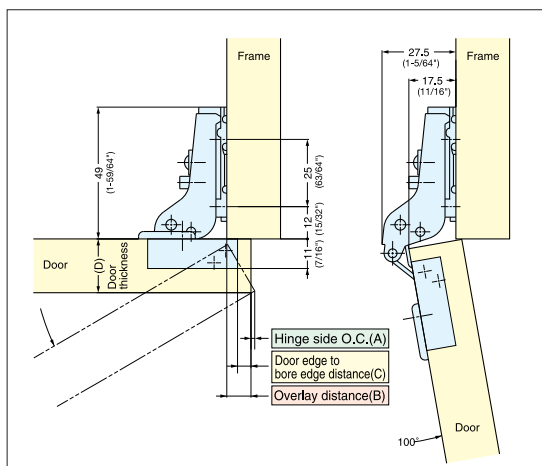

Bore Dimensions

Item No.	Type	Weight (g)	Carton (pcs)	Material	Finish
100-46/9 SUS 304B	Free Swinging	60	200	304 Stainless Steel	Polished
100-C46/9 SUS 304B	Self-Closing				

MOUNTING PLATE



100-P3A, P4A/32, P4A/32-3W SUS 304B






100-P3A-SUS 304B



100-P4A/32 SUS 304B




100-P4A/32-3W SUS 304B



Installation

- Mounting plate for 100 hinges.

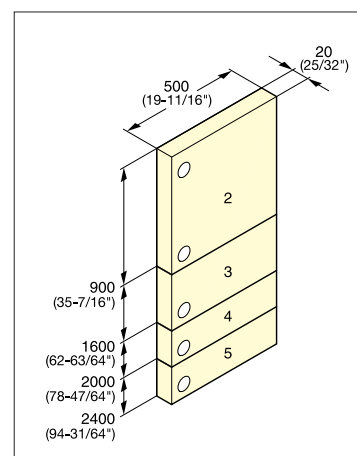

Number of hinges required.

Item No.	Weight (g)	Carton (pcs)
100-P3A-SUS 304B	40	400
100-P4A/32 SUS 304B		400
100-P4A/32-3W SUS 304B		400

Material	Finish
304 Stainless Steel	Polished